
ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT

Pb *leadfree*

CUSTOMER'S APPROVAL: ____________________ DATE: __________


FIRST ARTICLE SAMPLE REQUIRED: ☐ YES, ☐ NO.

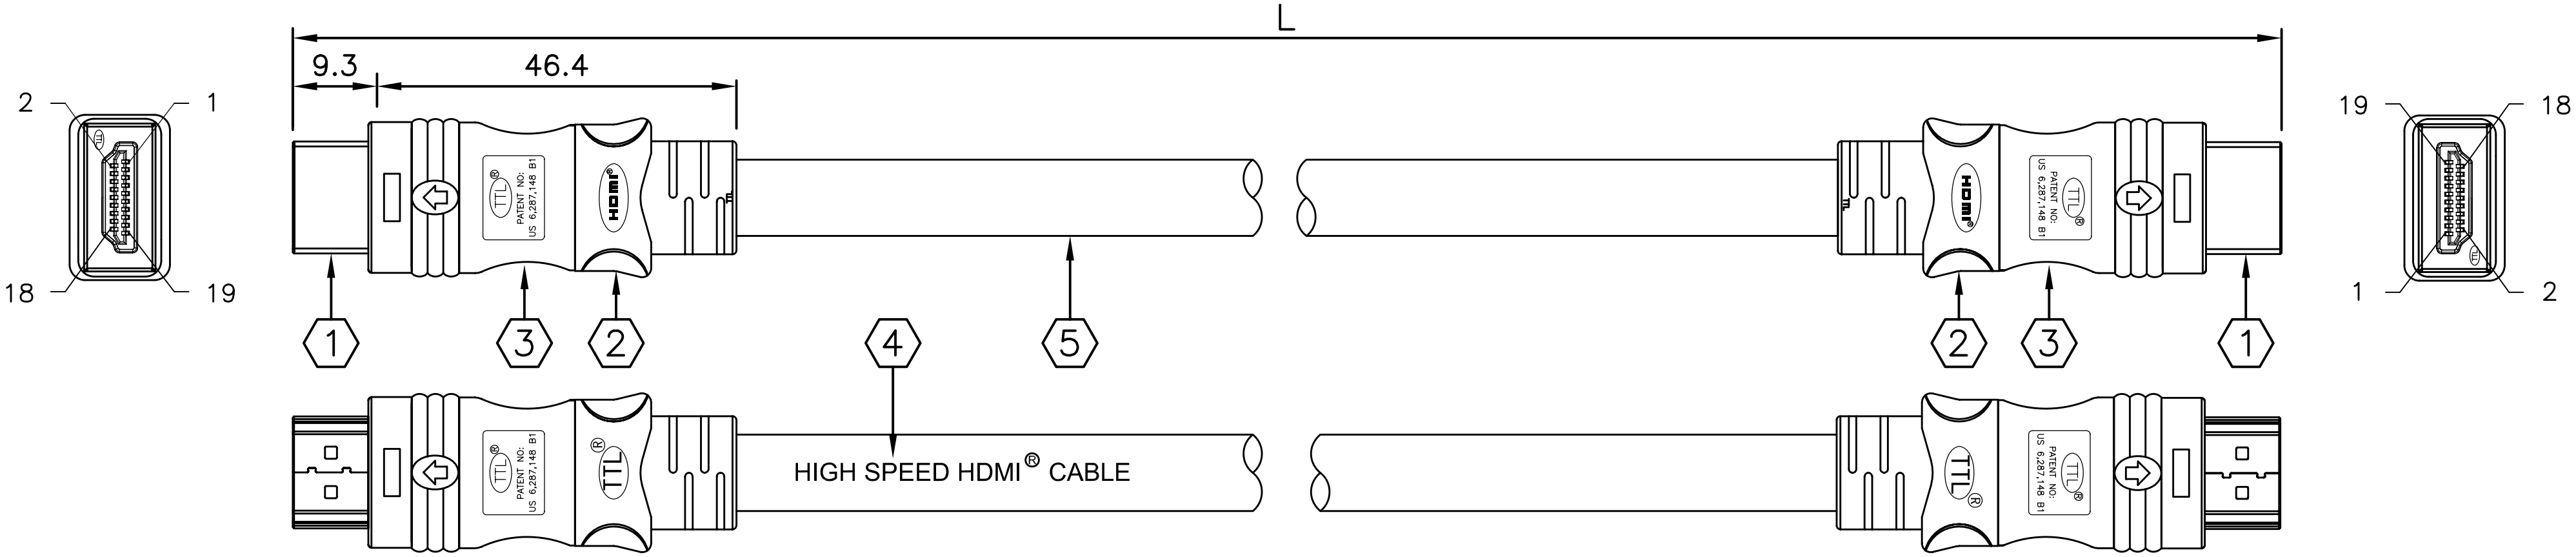


NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF–BLOK™ SHIELDING DESIGN.
2. (D) WIRE MARKING:
   TTL® E193793 AWM 20276 80°C 30V VW–1 TOTAL TECHNOLOGIES LTD.®
   SUPER LOW ATTENUATION CABLE (SLAC™)
3. 10.2 Gbps CABLE
4. PAD PRINT:
   0.1M ~ 7.5M : HIGH SPEED HDMI® CABLE
   7.6M UP : STANDARD HDMI® CABLE

PINOUT CONFIGURATION

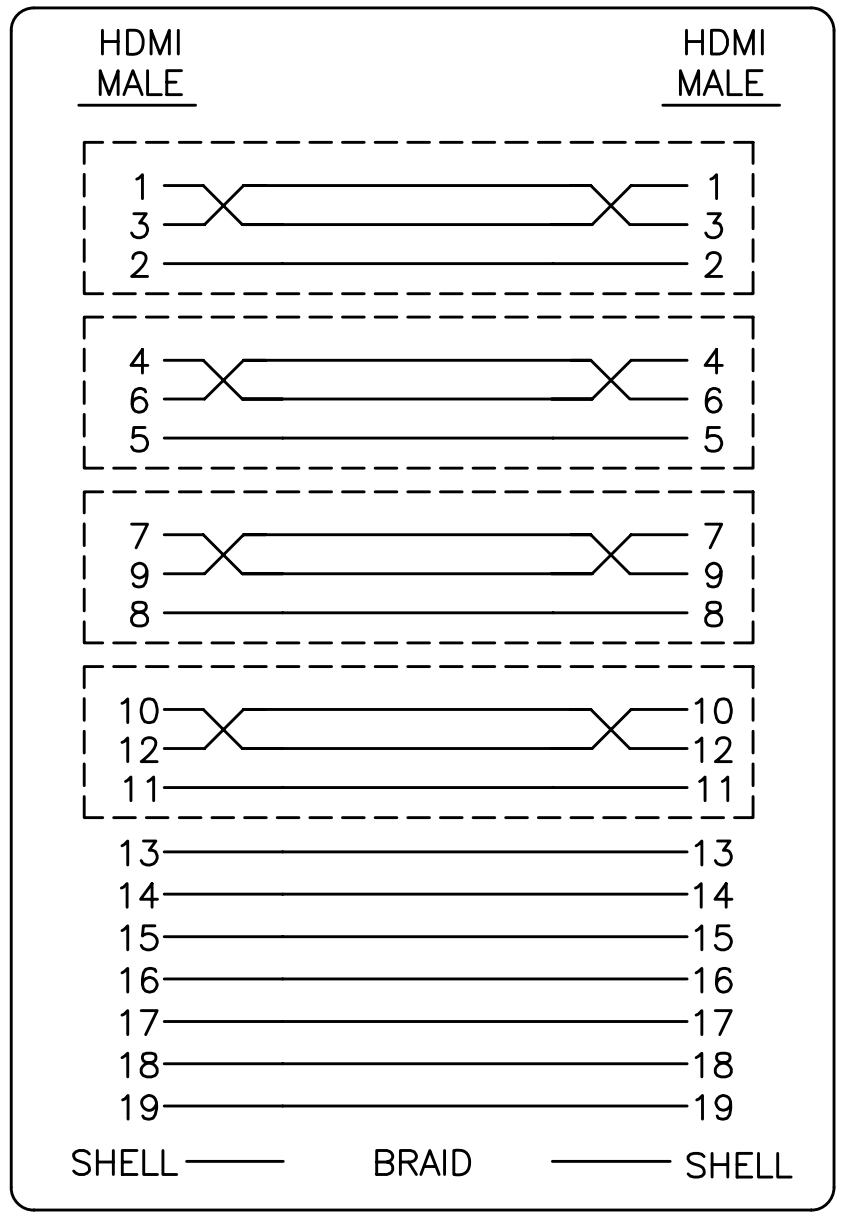

WIRE SECTION VIEW

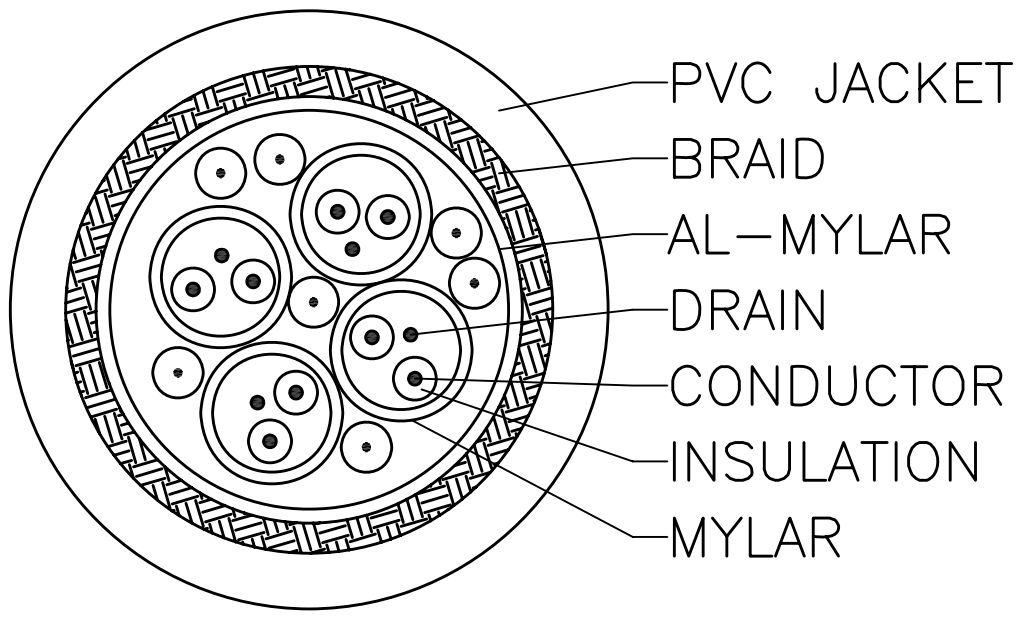

CUSTOMER'S P/N	P/N	L±(mm)
AK3753	SLAC–A–7.5M	7500±200
AK3754	SLAC–A–10M	10000±200
AK3756	SLAC–A–15M	15000±250
AK3758	SLAC–A–20M	20000±250
AK3759	SLAC–A–25M	25000±250

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN CONNECTOR MALE W/GOLD PLATED	2	PCS.
	PINS UL94V–0		
2	BLACK MOLDED PVC HOOD	2	PCS.
3	PAT. US 6,287,148 B1 RF–BLOK™ NICKEL PLATED SHIELDING	2	PCS.
	METAL CAN		
4	WHITE COLOR PAD PRINT	1	PCS.
5	(100 Ω SHIELDED TWIN PAIRS)x4+7C WIRE; AL–FOIL+85% BRAID	SEE	DWG.
	BLACK PVC JACKET. **SLAC CABLE**		

REVISED DETAILS			REVISED BY
REV.	DESCRIPTION	DATE	
A	ADD PRINT & WIRE SECTION VIEW &	2011.09.08	Z.Q.KANG
	CHANGE WIRE MRARKING		
B	ADD NOTE	2012.08.02	Z.Q.KANG
C	CHANGE P/N & ITEM 5 DESCRIPTION	2013.04.02	Z.Q.KANG
D	CHANGE WIRE MRARKING	2013.04.03	Z.Q.KANG

Part number: SEE TABLE	*Revision:* D
RFQ number:	*Drawing#:* 94061603
Drawn by: STANLEY	*Scale:* None
Checked by:	*Date:* 06/16/2005

AC